

Supplementary Material for:

Surveying the effects of ageing a high C-containing Co-based superalloy from the as-cast and solution heat treated conditions

James P. Moffat (J.P.M.)¹, Katerina A. Christofidou (K.A.C.)², Ming En Pek (M.E.P.)¹, Nicholas G. Jones (N.G.J.)¹, Paul Jackson (P.J.)³ Howard J. Stone (H.J.S.)^{1,*}

¹ Department of Materials Science and Metallurgy, University of Cambridge, 27 Charles Babbage Road, Cambridge, CB3 0FS, UK, mep58@cam.ac.uk (M.E.P), ngj22@cam.ac.uk (N.G.J.), hjs1002@cam.ac.uk (H.J.S.)

² Department of Materials Science and Engineering, Sir Robert Hadfield Building, The University of Sheffield, Mappin Street, Sheffield, S1 3JD, UK, k.christofidou@sheffield.ac.uk (K.A.C.)

³ Knauf Insulation Ltd., PO Box 10, Stafford Road, St Helens, Merseyside, WA10 3NS, UK, Paul.Jackson@knaufinsulation.com (P.J.)

* Correspondence: hjs1002@cam.ac.uk

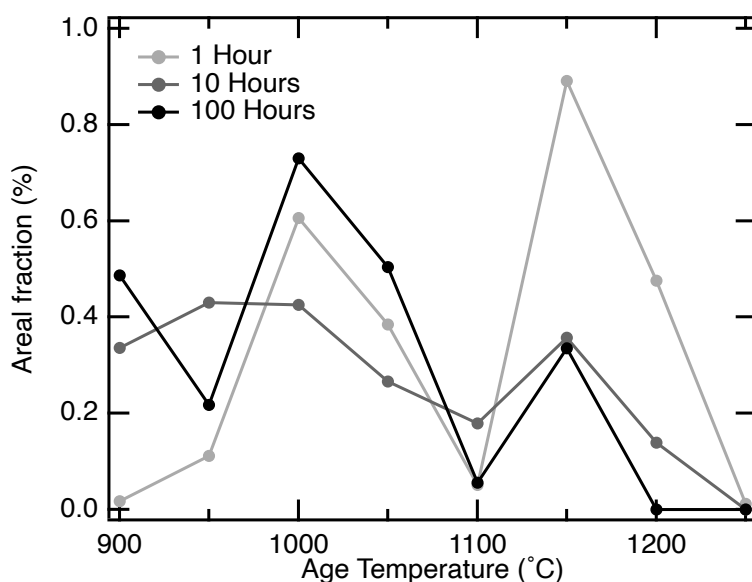


Figure S1: Total areal fractions of precipitates as a function of heat treatment temperature calculated from the data presented in Figure 7.